



CASAMBI

DESCRIPTION

Type	Track Spotlight
Article-number	141276L12326
Colour	silver
Energy Consumption	21.1 W
Efficiency	149 lm/W
Luminous Flux	3146 lm
Current (sec)	550 mA
Protection Class	IP C
Energy-Label	C
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 90
LES	15
Color Tolerance	2-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7 HE+
Photobiological safety	RG1

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	2
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 27 pcs
Tracks	Global Stucchi Eutrac

Control

Control	CASAMBI
Dimming Range	1-100 %

REFLECTOR

Technology	ULTRA
Material	Miro 20 / Miro 8
FWHM	24 / 55°
FWTM	65 / 81°

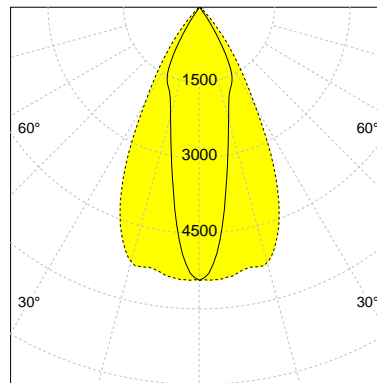

I-max : 5426 cd *

UGR : 25.9 / 21.8 (4H/8H - 70/50/20)

H/m	D1/m	D2/m	Emax/lx/klm *
1.0	0.4	1.1	1724
2.0	0.9	2.1	431
3.0	1.3	3.2	192
4.0	1.7	4.2	108

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_22