

GENERAL

| | |
|-------------------|----------------------|
| Article-number | 141279 |
| Type | Track Spotlight |
| colours | silver, black, white |
| Power consumption | < 32 W |
| Efficiency | 90 lm/W .. 154 lm/W |
| Luminous Flux | 1731 lm .. 4283 lm |
| Energy-Label | F .. C |
| Protection Class | IP20 |
| Cooling | Passive |

LED

| | |
|-------------------|----------------------------|
| CRI | CRI > 82 -> 92 |
| Color Temperature | 2700K, 3000K, 3500K, 4000K |
| Color Tolerance | 3-Step McAdam |


ELECTRICAL

| | |
|--------------------------|------------------------------|
| Wiring / Adapter | 3-Phase Adapter |
| Tracks | Globaltrack, Stucchi, Eutrac |
| Safety Class | 2 |
| Startup Time | < 1 s |
| Overload Protection | |
| Short Circuit Protection | |
| Power Supply | 220-240 50-60Hz |
| Environment | 0° - 30°C typical Ta 25°C |

Control

| | |
|---------------|-----------------------|
| Control | CASAMBI, ON/OFF, DALI |
| Dimming Range | 1-100 % |

REFLECTORS : ULTRA Technology

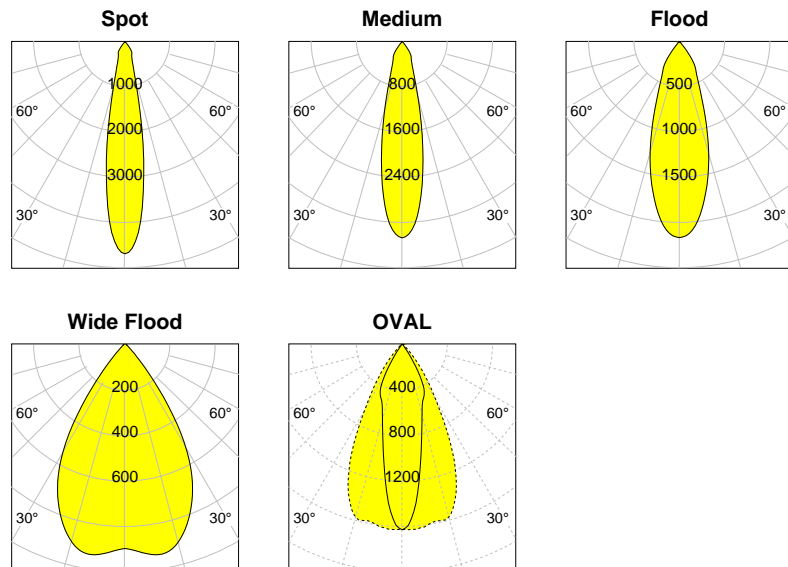

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_22