



## DESCRIPTION

|                    |              |
|--------------------|--------------|
| Type               | Swivel       |
| Article-number     | 141296L13136 |
| Colour             | black        |
| Energy Consumption | 24.7 W       |
| Efficiency         | 110 lm/W     |
| Luminous Flux      | 2724 lm      |
| Current (sec)      | 600 mA       |
| Protection Class   | IP           |
| Energy-Label       | E            |
| Cooling            | Passive      |

## LED

|                        |                         |
|------------------------|-------------------------|
| Color Temperature      | 3500K                   |
| Color Rendering        | CRI 90                  |
| LES                    | 9                       |
| Color Tolerance        | 2-Step McAdam           |
| Planckian Curve        | BBBL                    |
| Spectrum               | Premium White HE G7 HE+ |
| Photobiological safety | RG1                     |

## ELECTRICAL


|                                     |                          |
|-------------------------------------|--------------------------|
| Power Supply                        | 220-240, 50-60Hz         |
| Safety Class                        | 2                        |
| Startup Time                        | < 1s                     |
| Overload- / Shortcircuit Protection |                          |
| Wiring / Adapter                    | connector 3/5 Pol (DALI) |
| Max Luminaires MCB                  | B16A 50 pcs              |

## Control

|               |         |
|---------------|---------|
| Control       | DALI    |
| Dimming Range | 1-100 % |

## REFLECTOR

|            |               |
|------------|---------------|
| Technology | ULTRA         |
| Material   | Miro 8 Silver |
| FWHM       | $13^\circ$    |
| FWTM       | $24^\circ$    |

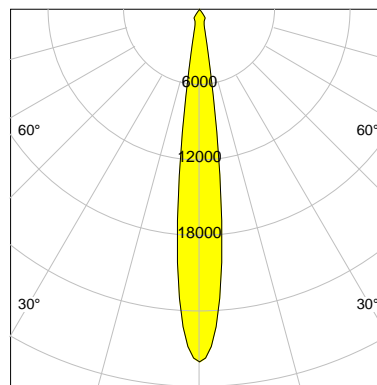

I-max : 28019 cd \*

UGR : 20.5 (4H/8H - 70/50/20)

| H/m | D/m | E <sub>max</sub> /lx/klm * |
|-----|-----|----------------------------|
| 1.0 | 0.2 | 10286                      |
| 2.0 | 0.5 | 2571                       |
| 3.0 | 0.7 | 1143                       |
| 4.0 | 0.9 | 643                        |

**Other configurations, accessories or controls like DALI or Wireless on request**

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_05\_23