

GENERAL

Article nr.	141360
Type	linear luminaire for 3-phase tracks
Colours	silver, black, white
Power consumption	max. 63W
Efficiency	> 160 lm/W
Luminous flux	> 10.000 lm
UGR	19 - 23
Energy efficiency label	F.. B
Protection class	IP 20
Cooling	passive

LED

CRI	CRI > 82 - > 92
Colour temperatures	3000K, 4000K
Colour tolerance	3-Step McAdam

ELECTRICAL


Wiring/Adapter	3-phase adapter
Safety class	1
Startup time	<1 s
Overload protection	yes
Short circuit protection	yes
Power supply	220- 240V 50 - 60 Hz
Ambient temperature	0° - 30°C typical Ta 25°C

CONTROL

Control	ON/OFF, DALI, CASAMBI
Dimming range	1-100%

OPTICS

Plastic lens
Aluminium louvre out of Miro®
Diffuser or micro-prismatic optic upon request

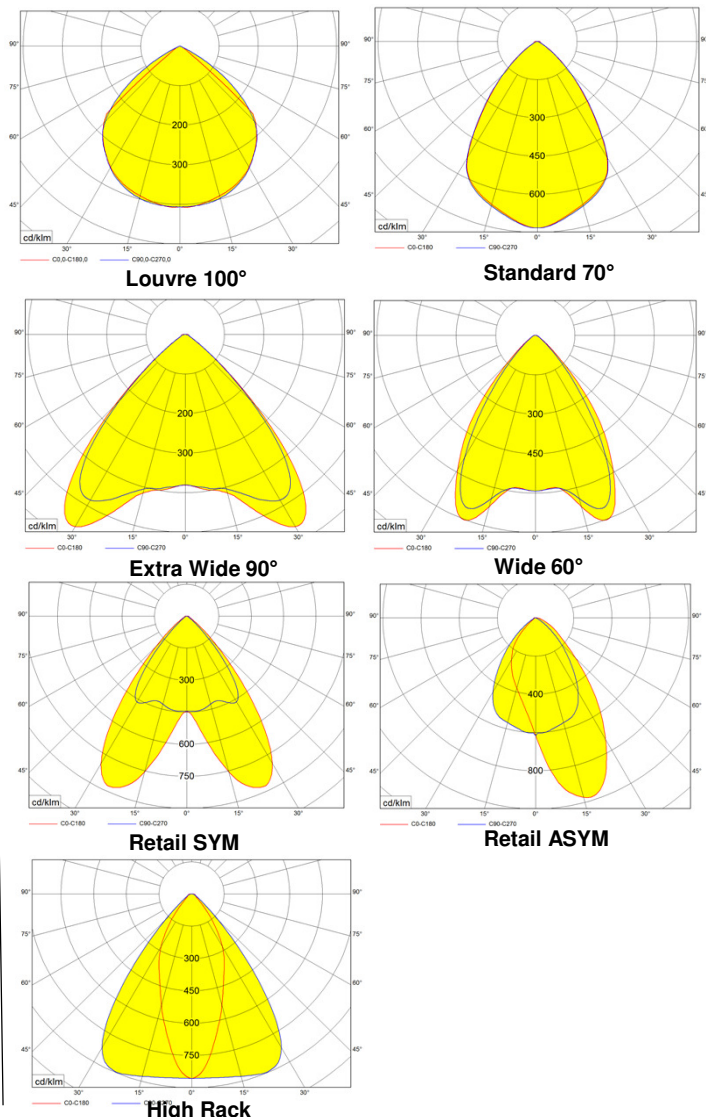

LENGTHS**PERFORMANCE CLASSES**

1.122 mm	4ft	1.700 lm – 6.000 lm	15W-43W
1.402,5 mm	5ft	2.100 lm – 7.500 lm	19W-53W
1.683 mm	6ft	2.200 lm – 9.000 lm	21W-63W

other ft-lengths feasible upon request

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2022_05_16