

GENERAL

Article nr.	141361
Type	linear luminaire suspended
Colours	silver, black, white
Power consumption	max. 63W
Efficiency	> 160 lm/W
Luminous flux	> 10.000 lm
UGR	19 - 23
Energy efficiency label	F.. B
Protection class	IP 20
Cooling	passive

LED

CRI	CRI > 82 - > 92
Colour temperatures	3000K, 4000K
Colour tolerance	3-Step McAdam

ELECTRICAL


Wiring/Adapter	5 pole
Safety class	1
Startup time	<1 s
Overload protection	yes
Short circuit protection	yes
Power supply	220- 240V 50 - 60 Hz
Ambient temperature	0° - 30°C typical Ta 25°C

CONTROL

Control	ON/OFF, DALI, CASAMBI
Dimming range	1-100%

OPTICS

Plastic lens
Aluminium louvre out of Miro®
Diffuser or micro-prismatic optic upon request

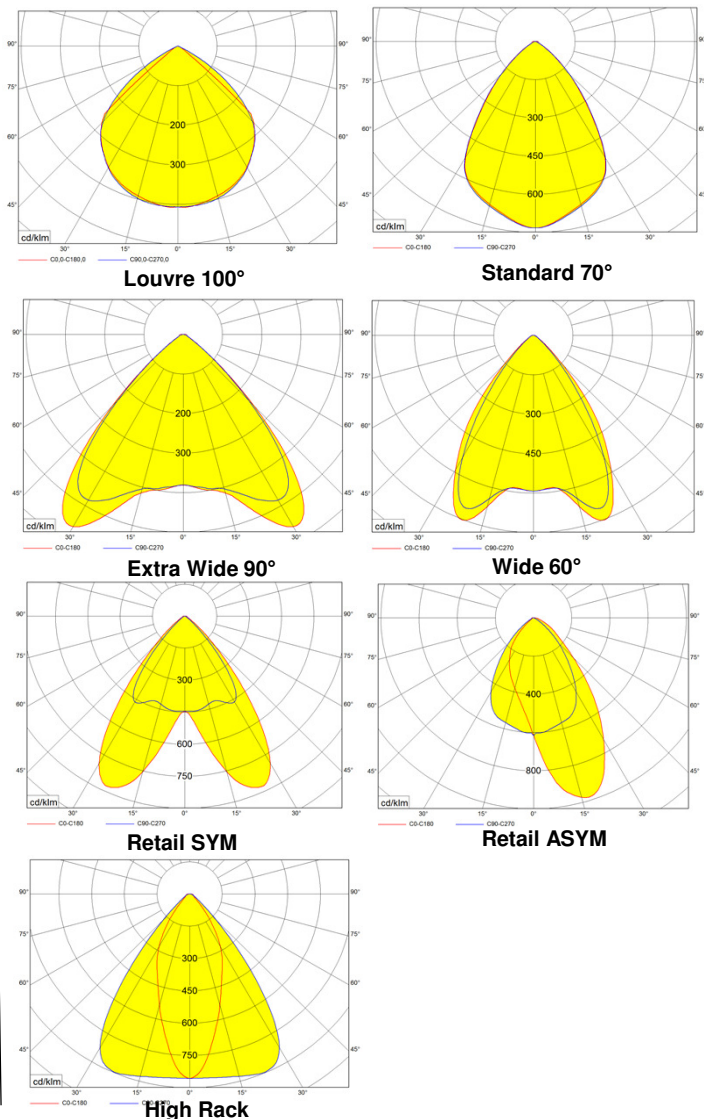

LENGTHS**PERFORMANCE CLASSES**

1.122 mm	4ft	1.700 lm – 6.000 lm	15W-43W
1.402,5 mm	5ft	2.100 lm – 7.500 lm	19W-53W
1.683 mm	6ft	2.200 lm – 9.000 lm	21W-63W

other ft-lengths feasible upon request

OPTIONS and ACCESSORIES

Indirect lighting

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2022_05_16