



## DESCRIPTION

|                    |              |
|--------------------|--------------|
| Type               | Pendant      |
| Article-number     | 141418L11729 |
| Colour             | black        |
| Energy Consumption | 22.8 W       |
| Efficiency         | 106 lm/W     |
| Luminous Flux      | 2418 lm      |
| Current (sec)      | 600 mA       |
| Protection Class   | IP E         |
| Energy-Label       | E            |
| Cooling            | Passive      |

## LED

|                        |               |
|------------------------|---------------|
| Color Temperature      | 2700K         |
| Color Rendering        | CRI 92        |
| LES                    | 15            |
| Color Tolerance        | 3-Step McAdam |
| Planckian Curve        | BBL           |
| Spectrum               | Warm White G7 |
| Photobiological safety | RG2           |

## ELECTRICAL


|                                     |                        |
|-------------------------------------|------------------------|
| Power Supply                        | 220-240, 50-60Hz       |
| Safety Class                        | 1                      |
| Startup Time                        | < 1s                   |
| Overload- / Shortcircuit Protection |                        |
| Wiring / Adapter                    | 3-Pol. / 5-Pol. (DALI) |
| Max Luminaires MCB                  | B16A 50 pcs            |

## Control

|               |         |
|---------------|---------|
| Control       | DALI    |
| Dimming Range | 1-100 % |

## REFLECTOR

|            |                  |
|------------|------------------|
| Technology | ULTRA            |
| Material   | Miro 20 / Miro 8 |
| FWHM       | 24 / 55°         |
| FWTM       | 65 / 81°         |

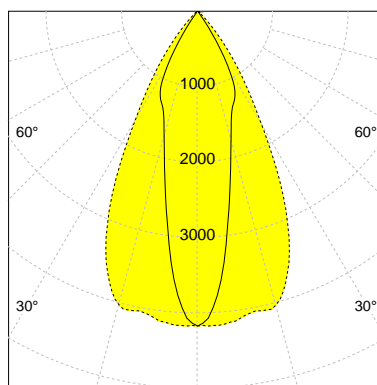

I-max : 4170 cd \*

UGR : 24.9 / 20.9 (4H/8H - 70/50/20)

| H/m | D1/m | D2/m | Emax/lx/klm * |
|-----|------|------|---------------|
| 1.0 | 0.4  | 1.1  | 1724          |
| 2.0 | 0.9  | 2.1  | 431           |
| 3.0 | 1.3  | 3.2  | 192           |
| 4.0 | 1.7  | 4.2  | 108           |

**Other configurations, accessories or controls like DALI or Wireless on request**

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_05\_23