



GENERAL

Article-number	141446
Type	Swivel
colours	silver, black, white
Power consumption	< 40 W
Efficiency	108 lm/W .. 157 lm/W
Luminous Flux	3067 lm .. 5839 lm
Energy-Label	E .. C
Protection Class	IP
Cooling	Passive

LED

CRI	CRI > 80 -> 92
Color Temperature	2700K, 3000K, 3500K, 4000K
Color Tolerance	3-Step McAdam


ELECTRICAL

Wiring / Adapter	connector 3/5 PoI (DALI)
Safety Class	2
Startup Time	< 1 s
Overload Protection	
Short Circuit Protection	
Power Supply Environment	220-240 50-60Hz 0° - 30°C typical Ta 25°C

Control

Control	CASAMBI, DALI, ON/OFF
Dimming Range	100 %

REFLECTORS : ULTRA Technology

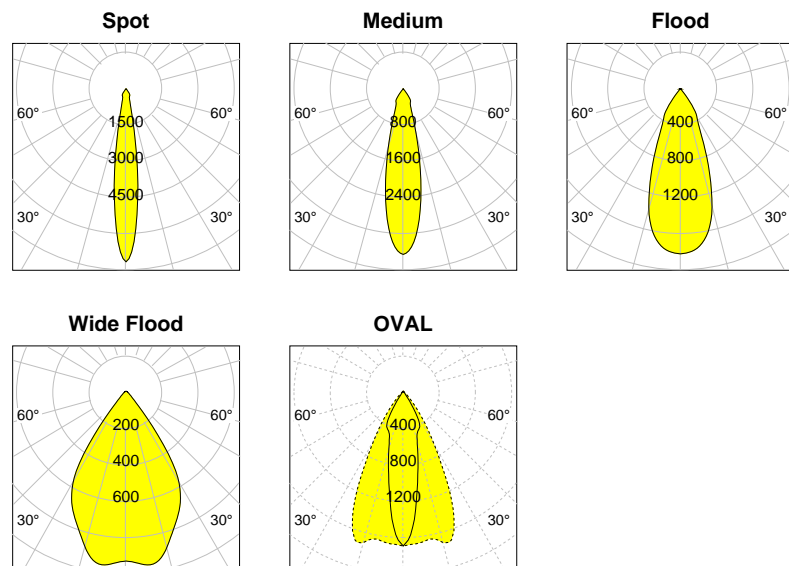

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_08_09