

### DESCRIPTION

Type	Track Spotlight
Article-number	141123L10012
Colour	white
Energy Consumption	40.5 W
Efficiency	141 lm/W
Luminous Flux	5694 lm
Current (sec)	1050 mA
Protection Class	IP
Energy-Label	C
Cooling	Passive

### LED

Color Temperature	4000K
Color Rendering	CRI 90
LES	19
Color Tolerance	2-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7 HE+
Photobiological safety	RG1

### ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 50 pcs

### Control

Control	DALI
Dimming Range	1-100 %

### REFLECTOR

Technology	ULTRA
Material	Miro 8 Silver
FWHM	15°
FWTM	30°

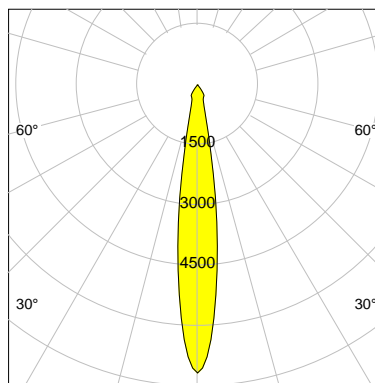

I-max : 7154 cd/klm \*

UGR : 19.6 (4H/8H - 70/50/20)

H/m	D/m	E <sub>max</sub> /lx/klm *
1.0	0.3	7154
2.0	0.5	1789
3.0	0.8	795
4.0	1.1	447

**Other configurations, accessories or controls like DALI or Wireless on request**

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_08\_09