



DESCRIPTION

Type	Track Spotlight
Article-number	141123L10520
Colour	white
Energy Consumption	34.2 W
Efficiency	128 lm/W
Luminous Flux	4389 lm
Current (sec)	900 mA
Protection Class	IP
Energy-Label	D
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 92
LES	18,5
Color Tolerance	3-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7
Photobiological safety	RG2

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 4 Silver
FWHM	24°
FWTM	51°

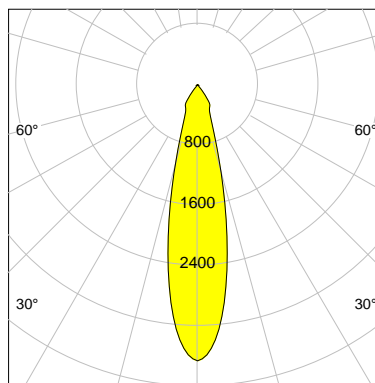

I-max : 3654 cd/klm *

UGR : 18.8 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	0.4	3654
2.0	0.8	914
3.0	1.3	406
4.0	1.7	228

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_08_09