



## DESCRIPTION

Type	Track Spotlight
Article-number	141128L11415
Colour	white
Energy Consumption	17.0 W
Efficiency	128 lm/W
Luminous Flux	2186 lm
Current (sec)	450 mA
Protection Class	IP
Energy-Label	D
Cooling	Passive

## LED

Color Temperature	4000K
Color Rendering	CRI 92
LES	15
Color Tolerance	3-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7
Photobiological safety	RG2

## ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 50 pcs

## Control

Control	On/Off
---------	--------

## REFLECTOR

Technology	ULTRA
Material	Miro 4 Silver
FWHM	33°
FWTM	71°

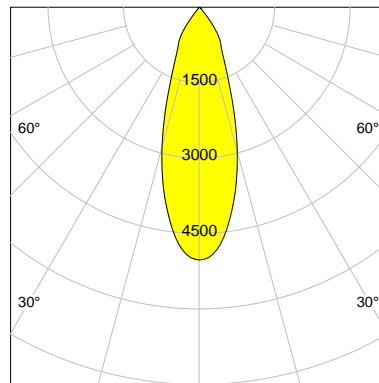

I-max : 5022 cd \*

UGR : 20.7 (4H/8H - 70/50/20)

H/m	D/m	E <sub>max</sub> /lx/klm *
1.0	0.6	2297
2.0	1.2	574
3.0	1.8	255
4.0	2.4	144

### Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_05\_17