



## DESCRIPTION

Type	Track Spotlight
Article-number	141279L10329
Colour	white
Energy Consumption	31.8 W
Efficiency	129 lm/W
Luminous Flux	4118 lm
Current (sec)	800 mA
Protection Class	IP 20
Energy-Label	D
Cooling	Passive

## LED

Color Temperature	4000K
Color Rendering	CRI 82
LES	15
Color Tolerance	3-Step McAdam
Planckian Curve	BBL
Spectrum	Neutral White G7
Photobiological safety	RG2

## ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	2
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 27 pcs
Tracks	Global Stucchi

## Control

Control	DALI
Dimming Range	1-100 %

## REFLECTOR

Technology	ULTRA
Material	Miro 8 Silver
FWHM	20°
FWTM	40°

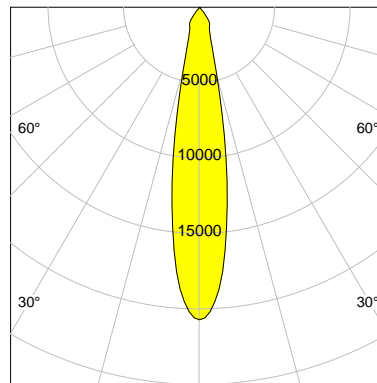

I-max : 20693 cd \*

UGR : 22.3 (4H/8H - 70/50/20)

H/m	D/m	E <sub>max</sub> /lx/klm *
1.0	0.3	5025
2.0	0.7	1256
3.0	1.0	558
4.0	1.4	314

## Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_05\_22