



DESCRIPTION

Type	Swivel
Article-number	141296L11998
Colour	white
Energy Consumption	17.0 W
Efficiency	119 lm/W
Luminous Flux	2018 lm
Current (sec)	450 mA
Protection Class	IP
Energy-Label	D
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 92
LES	15
Color Tolerance	3-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7
Photobiological safety	RG2

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	2
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	connector 3/5 Pol (DALI)
Max Luminaires MCB	B16A 50 pcs

Control

Control	DALI
Dimming Range	1-100 %

REFLECTOR

Technology	ULTRA
Material	Miro 20 Silver
FWHM	64°
FWTM	84°

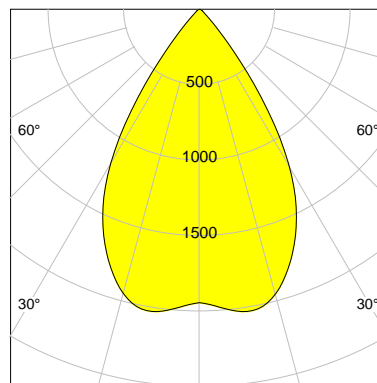

I-max : 2026 cd *

UGR : 22.6 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	1.2	963
2.0	2.5	241
3.0	3.7	107
4.0	5.0	60

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_23