



DESCRIPTION

Type	Swivel
Article-number	141296L12338
Colour	black
Energy Consumption	20.9 W
Efficiency	140 lm/W
Luminous Flux	2915 lm
Current (sec)	550 mA
Protection Class	IP
Energy-Label	C
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 90
LES	15
Color Tolerance	2-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7 HE+
Photobiological safety	RG1

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	2
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	connector 3/5 Pol (DALI)
Max Luminaires MCB	B16A - 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 20 / Miro 8
FWHM	24 / 55°
FWTM	65 / 81°

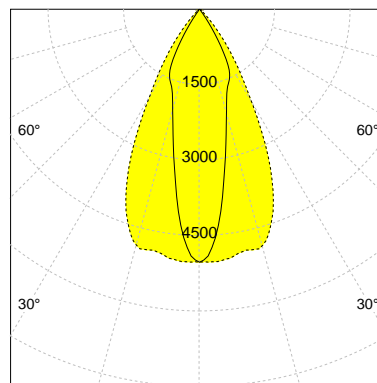

I-max : 5028 cd *

UGR : 25.6 / 21.6 (4H/8H - 70/50/20)

H/m	D1/m	D2/m	Emax/lx/klm *
1.0	0.4	1.1	1724
2.0	0.9	2.1	431
3.0	1.3	3.2	192
4.0	1.7	4.2	108

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_23