

DESCRIPTION

Type	Downlight
Article-number	141382L10307
Colour	white
Energy Consumption	40.5 W
Efficiency	140 lm/W
Luminous Flux	5685 lm
Current (sec)	1050 mA
Protection Class	IP C
Energy-Label	C
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 90
LES	19
Color Tolerance	2-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White G7 HE+
Photobiological safety	RG1

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	2
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	connector 3/5 Pol (DALI)
Max Luminaires MCB	B16A - 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 8 Silver
FWHM	15°
FWTM	30°

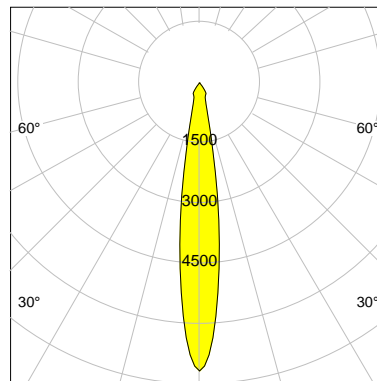

I-max : 7154 cd/klm *

UGR : 19.6 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	0.3	7154
2.0	0.5	1789
3.0	0.8	795
4.0	1.1	447

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_08_09