



DESCRIPTION

Type	Pendant
Article-number	141418L10932
Colour	silver
Energy Consumption	22.8 W
Efficiency	124 lm/W
Luminous Flux	2835 lm
Current (sec)	600 mA
Protection Class	IP
Energy-Label	D
Cooling	Passive

LED

Color Temperature	2700K
Color Rendering	CRI 90
LES	15
Color Tolerance	2-Step McAdam
Planckian Curve	BBL
Spectrum	Warm White G7 HE+
Photobiological safety	RG1

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Pol. / 5-Pol. (DALI)
Max Luminaires MCB	B16A 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 4 Silver
FWHM	33°
FWTM	71°

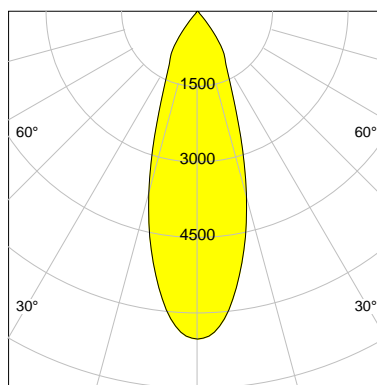

I-max : 6512 cd *

UGR : 21.6 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	0.6	2297
2.0	1.2	574
3.0	1.8	255
4.0	2.4	144

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_23