



DESCRIPTION

Type	Pendant
Article-number	141418L11044
Colour	silver
Energy Consumption	18.9 W
Efficiency	140 lm/W
Luminous Flux	2655 lm
Current (sec)	500 mA
Protection Class	IP C
Energy-Label	C
Cooling	Passive

LED

Color Temperature	4000K
Color Rendering	CRI 82
LES	15
Color Tolerance	3-Step McAdam
Planckian Curve	BBL
Spectrum	Neutral White G7
Photobiological safety	RG2

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Pol. / 5-Pol. (DALI)
Max Luminaires MCB	B16A 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 4 Silver
FWHM	33°
FWTM	71°

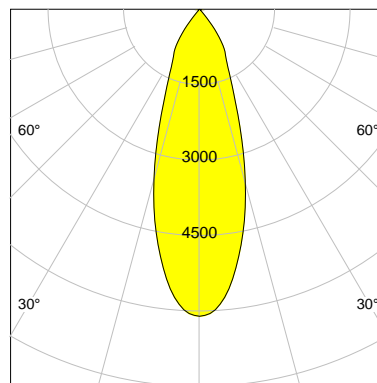

I-max : 6099 cd *

UGR : 21.4 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	0.6	2297
2.0	1.2	574
3.0	1.8	255
4.0	2.4	144

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_23