



DESCRIPTION

Type	Pendant
Article-number	141418L11978
Colour	silver
Energy Consumption	24.7 W
Efficiency	113 lm/W
Luminous Flux	2783 lm
Current (sec)	600 mA
Protection Class	IP
Energy-Label	E
Cooling	Passive

LED

Color Temperature	3500K
Color Rendering	CRI 90
LES	9
Color Tolerance	2-Step McAdam
Planckian Curve	BBBL
Spectrum	Premium White HE G7 HE+
Photobiological safety	RG1

ELECTRICAL


Power Supply	220-240, 50-60Hz
Safety Class	1
Startup Time	< 1s
Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Pol. / 5-Pol. (DALI)
Max Luminaires MCB	B16A 50 pcs

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 8 Silver
FWHM	13°
FWTM	24°

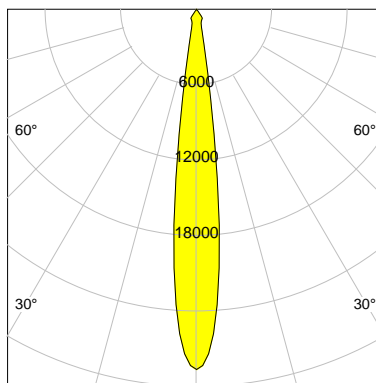

I-max : 28626 cd *

UGR : 20.6 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	0.2	10286
2.0	0.5	2571
3.0	0.7	1143
4.0	0.9	643

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023_05_23