



## DESCRIPTION

|                    |                 |
|--------------------|-----------------|
| Type               | Track Spotlight |
| Article-number     | 141564L10033    |
| Colour             | silver          |
| Energy Consumption | 31.1 W          |
| Efficiency         | 142 lm/W        |
| Luminous Flux      | 4428 lm         |
| Current (sec)      | 800 mA          |
| Protection Class   | IP 20           |
| Energy-Label       | C               |
| Cooling            | Passive         |

## LED

|                        |                      |
|------------------------|----------------------|
| Color Temperature      | 4000K                |
| Color Rendering        | CRI 90               |
| LES                    | 15                   |
| Color Tolerance        | 2-Step McAdam        |
| Planckian Curve        | BBBL                 |
| Spectrum               | Premium White G7 HE+ |
| Photobiological safety | RG1                  |

## ELECTRICAL


|                                     |                       |
|-------------------------------------|-----------------------|
| Power Supply                        | 220-240, 50-60Hz      |
| Safety Class                        | 2                     |
| Startup Time                        | < 1s                  |
| Overload- / Shortcircuit Protection |                       |
| Wiring / Adapter                    | 3-Phase Adapter       |
| Max Luminaires MCB                  | B16A 27 pcs           |
| Tracks                              | Global Stucchi Eutrac |

## Control

|         |        |
|---------|--------|
| Control | On/Off |
|---------|--------|

## REFLECTOR

|            |               |
|------------|---------------|
| Technology | ULTRA         |
| Material   | Miro 8 Silver |
| FWHM       | 16°           |
| FWTM       | 32°           |

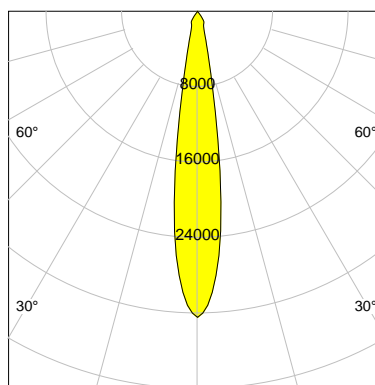

I-max : 32426 cd \*

UGR : 19.6 (4H/8H - 70/50/20)

| H/m | D/m | E <sub>max</sub> /lx/klm * |
|-----|-----|----------------------------|
| 1.0 | 0.3 | 7323                       |
| 2.0 | 0.6 | 1831                       |
| 3.0 | 0.9 | 814                        |
| 4.0 | 1.2 | 458                        |

### Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2023\_05\_24